

VGA@BIOS 可簡易更新顯示卡 VBIOS

更新 VBIOS 前，我們建議您先將預設的 VBIOS 備份。請參考下列步驟說明如何將您顯示卡的 VBIOS 備份及更新。

1. VBIOS 備份

步驟 1

下載 [VGA@BIOS](#) 並安裝

| VGA Tools -- @BIOS | | Version 4.3 |
|--------------------|---|-------------|
| Description | VGA Tools -- @BIOS Support NVIDIA GeForce 7-series, 8-series, 9-series, 200-series, 400- Radeon 2-series, 3-series, 4-series, 5-series, 6-series models. OS: Windows XP 32bit, Windows XP 64bit, Windows Vista 32bit, Windows 64bit, Windows 7 32bit, Windows 7 64bit | |
| Download Here | Asia China America Europe Europe(Russia) : FTP / Http | |


步驟 2

運行 VGA@BIOS 後點選“BACKUP VGA BIOS”



步驟 3

選擇要備份的資料夾或目錄後點選“存檔”

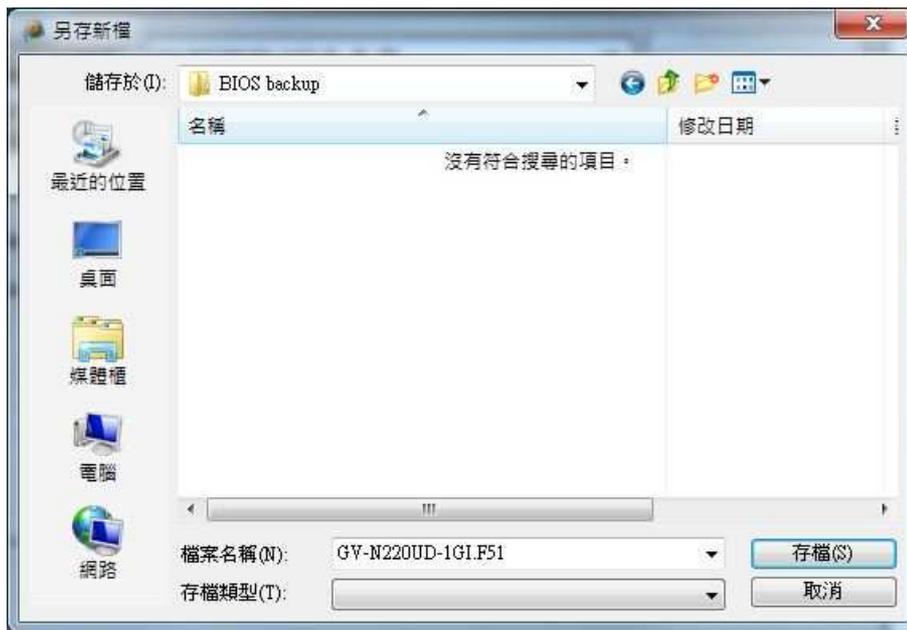

步驟 4

點選“OK” VBIOS 開始進行存檔



VBIOS 備份完成



2. 更新 VBIOS


步驟 1

運行 VGA@BIOS 後點選“FLASH”



步驟 2

選取 VBIOS 檔案後點選“開啟舊檔”

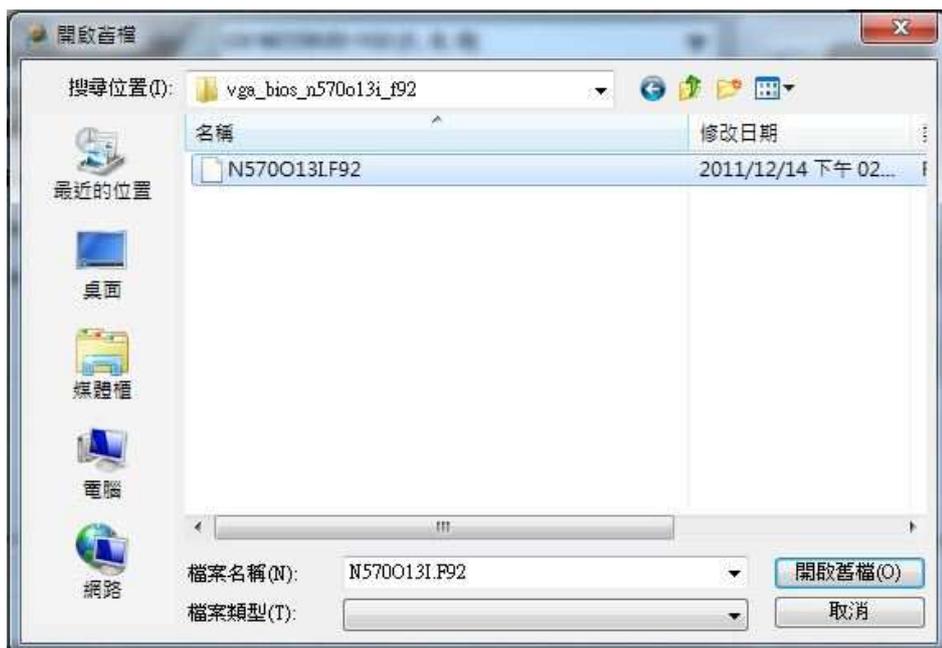

步驟 3

點選“OK”開始更新 VBIOS



VBIOS 更新成功，請選擇 YES 重新開機

